


## FM/AM RADIO ANTENNA

# AUTO EA 60 PRO

### Hi-Gain Electronic Antenna for Windscreen

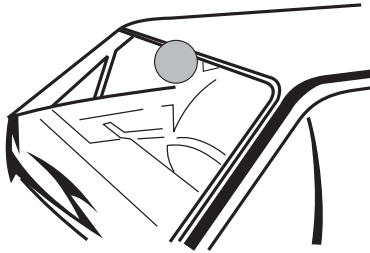

### Electronic Aerial

Clean the inside of the windscreen glass with a solvent or alcohol (Fig. 1). remove the protective wax paper from the adhesive part at the rear of the amplifier box (Fig.2) and fix it at half of the windscreen near the upper gasket. Take care in respecting minimum distance of 4 cm between the reception section and the car body (Fig.3). Fix the copper plait to a convenient point and ensure a good contact with the body of the vehicle (under the rear-vision mirror mounting screw or drilling a small hole and fix it by using a thread forming screw - Fig.4/Fig.5). **Attention! Do not lengthen the ground plait.** Insert the cable under the rubber strip of the windscreen (this operation can be simplified by using the spatula in the kit - Fig.6). Connect the antenna cable jack to the plug of the car radio. The car radio outlet provided for electric aerials is suitable to connect the power cable. Should radio connection be established on key contact, it is also possible to connect the antenna cable just after the fuse.

